





Coating & Printing machines HM300 FLX



Manufacture labels, tapes and tamper evident products in one pass.

In association with



HM300 FLX FEATURES



Driven unwind with Edge guide and Splice unit


Web air turn bar can be positioned to flip the web between stations



UV Curing system

Video inspection system

Servo web registration & tension control

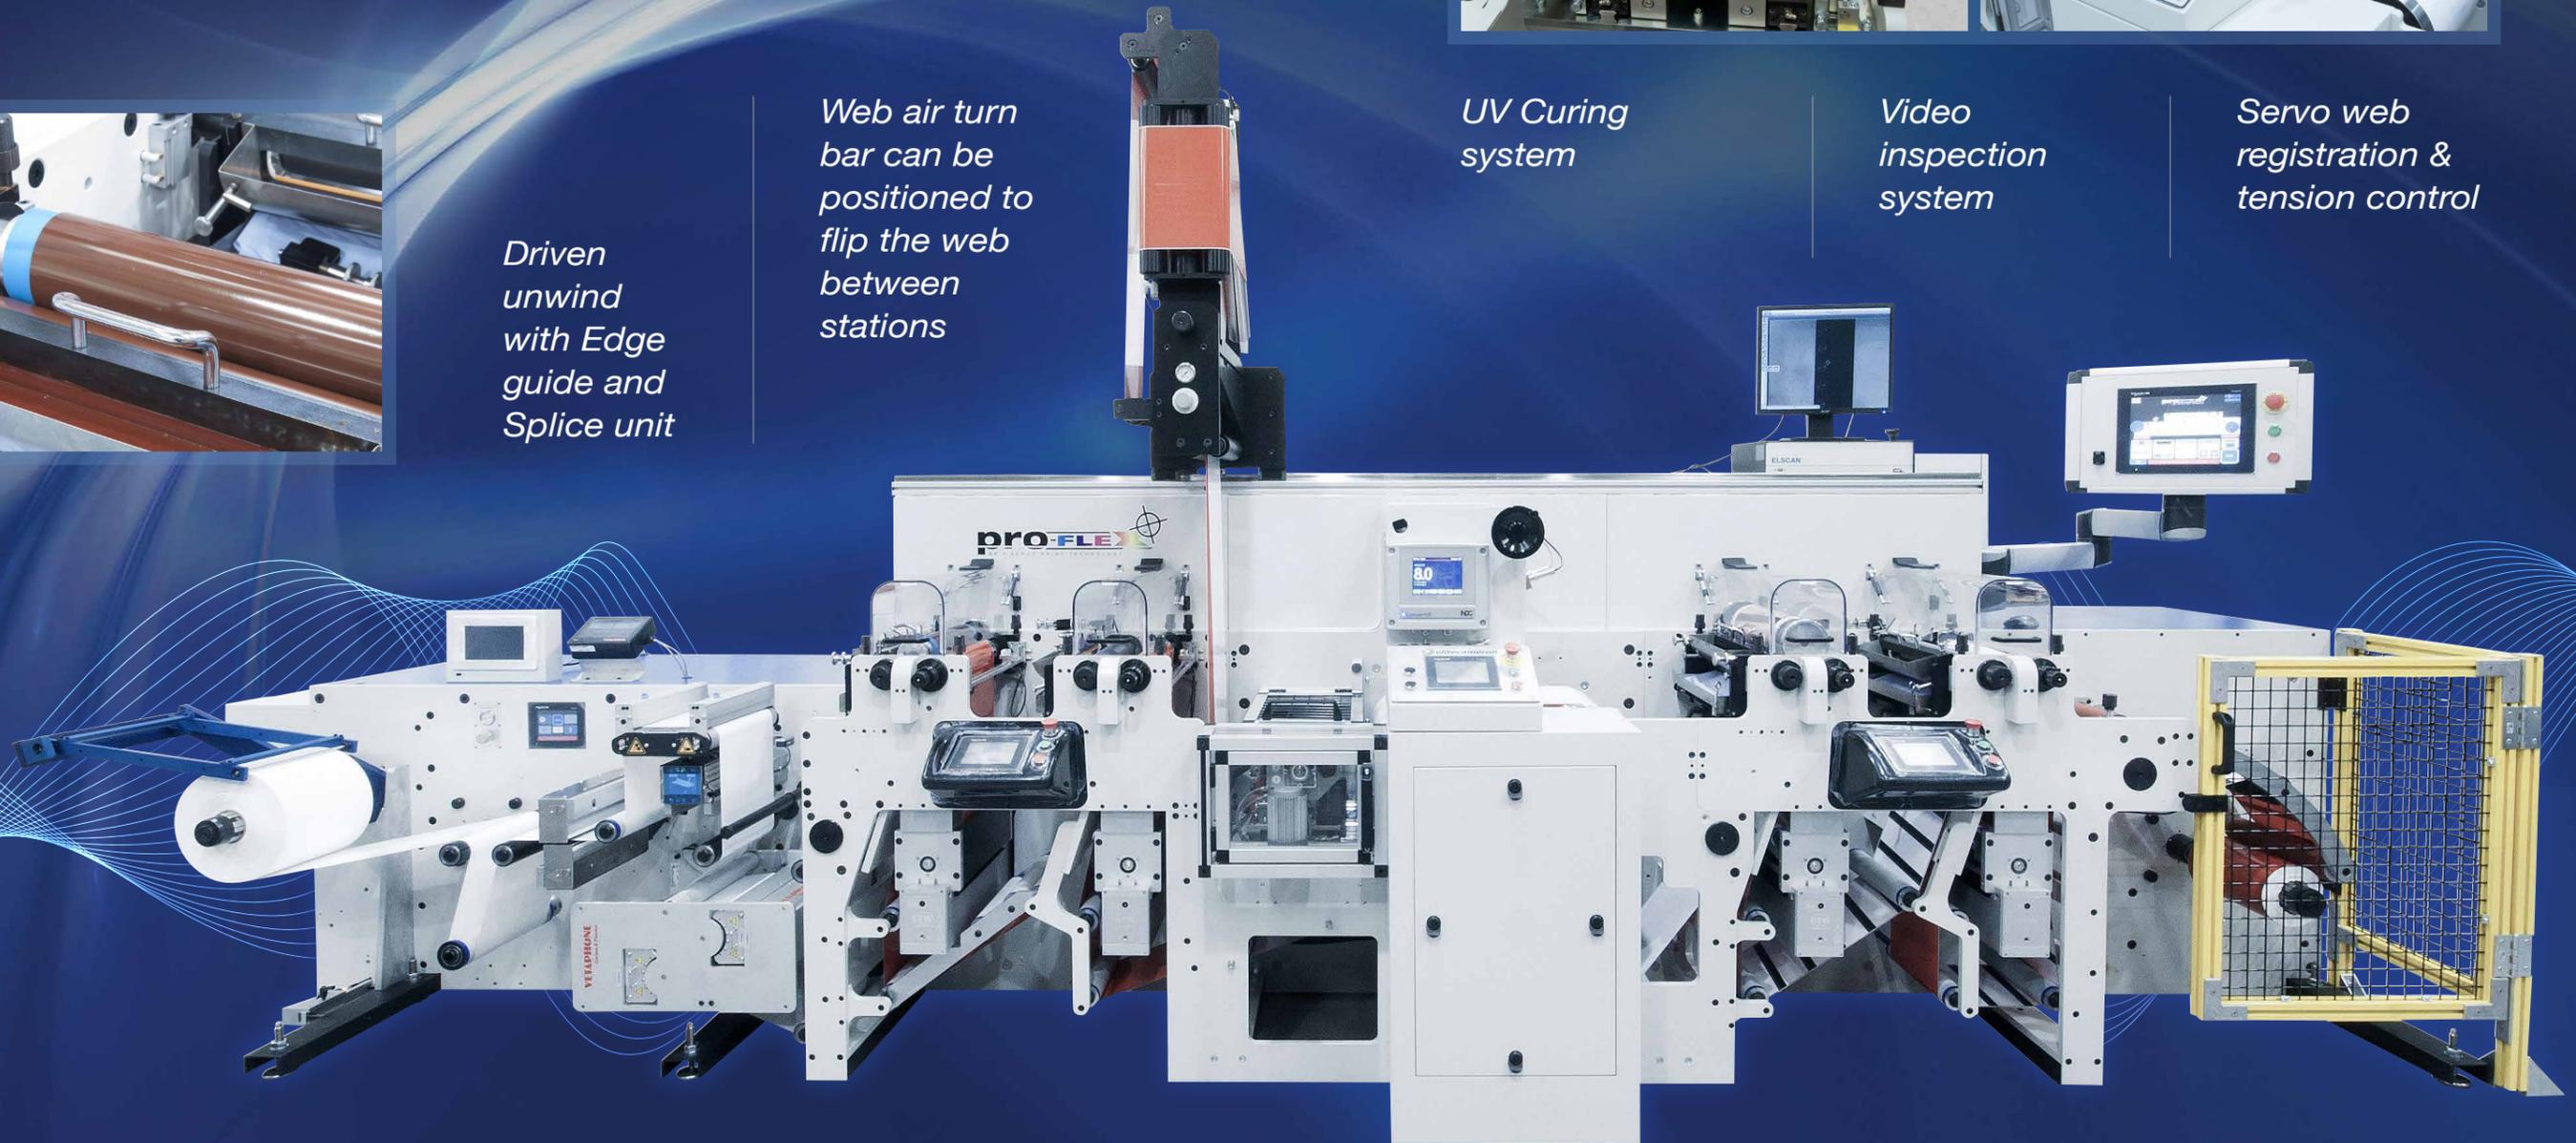

Double sided Corona treater & Web cleaner

First two Flexo stations can be used to print and apply release coating

Hot Melt coating module with coat weight measurement

Up to 4 Flexo print modules

Die cut, slit & Rewind options

Manufacture labels, tapes and tamper evident products in one pass.

HM300 FLX

Coating & Printing Machine specifications

HM300 FLX	SPECIFICATIONS
Web Width	330mm
Unwind Diameter	1000mm
Rewind Diameter	1000mm
Maximum Speed	120 m/min
Core Sizes	76mm & 152mm
Flexo Options	2 + HM + 2 or 4
Other Options	Lamination, Slitting, Die cutting

The HM300 FLX has the options to Print on a liner, apply a release coating, flip the web over between any of the stations, hot melt coat, laminate in a face stock if required, 2 or 4C print, die cut, slit and rewind all in one pass.

The modular format of the machine can be configured to provide a great mix of capabilities for customers. It eliminates the need to purchase pre-release coated or treated liners and combines multiple operations for inline manufacture of finished products.

The Flexo' units can be used for printing and the application of a wide variety of UV curable release coatings. The machine utilises the latest Rhino GEW UV system, Double sided Vetaphone corona treater and Proact web cleaner.

The coating module incorporates Valco Melton coating equipment, now standard issue on the full range of Elite Cameron Hot Melt Coaters. The head accurately applies stripes or full width, streak free coating of HM adhesives. The coat weight is monitored and displayed continuously on an NDC measurement system.



tel: +1 207 894 7016
fax: +1 207 893 1905



tel: +44 1823 283411
fax: +44 1823 251095

email: sales@elitecameron.com

www.elitecameron.com